


## Leaded Inductors for Class D

插件型数字功放电感

## ■ PD1623 Series

## Features 特点

- Space reduction is realized by 2 in 1 construction.  
二合一结构缩小空间
- The optimal design realizes high quality sound and low distortion.  
高音质、低失真最佳设计
- Small compact, and DIP type.  
小体积，直插类型
- Low radiation noise by magnetically shielded construction  
闭合磁路封装，低辐射
- High current, Low resistance.  
大电流，低电阻
- Operating temperature : -40°C~+125°C.  
工作温度：-40°C~+125°C

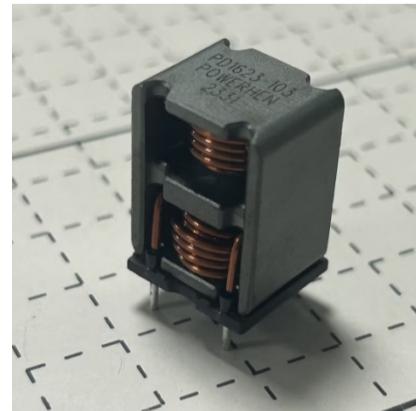

## Applications 应用

- Suitable as choke for digital amp. Car audio, LCD and PDP TV, 5.1ch Home theater, etc.  
适用于数字功放扼流。如汽车音响，LCD 电视和 PDP 电视，5.1 声道家庭影院等

## Electrical characteristics 电气特性

Part number 料号	Inductance ① 电感量 $\mu\text{H} \pm 20\%$	DCR ② typ	SRF ③ 自谐频率 MHz	Isat ④ 直流饱和电流 A typica			Irms ⑤ 温升电流 A typical	
				typical	10% drop	20% drop	30% drop	20°C rise
PD1623-103ME	10	9.0	11	13	12	14.4	15	4.3
PD1623-153ME	15	17.6	20	10	9.2	11	13	3.9
PD1623-223ME	22	22.7	28	6	9	10.5	12	3.1
								4.2


## Remark

- ① Inductance is measured with a LCR meter Agilent 4284A or equivalent.  
Test frequency at 100kHz
- ② DC resistance is measured with keithley 580 Milliohm Meter , or equivalent.  
Reference ambient temperature 25°C
- ③ SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- ④ DC current at 25°C that causes the specified Inductance drop from its value without current.
- ⑤ Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- ⑥ Electrical specifications at 25°C



## 备注

- ① 电感量测试采用 Agilent 4284A 数字电桥或同等仪器；  
测试频率 100KHz
- ② 直流电阻测试采用 keithley 580 毫欧表或同等仪器；  
环境温度 25° C
- ③ SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具测量。
- ④ 直流电流在 25° C，加载导致指定电感从没有电流的值下降。
- ⑤ 导致指定温度从 25° C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- ⑥ 25° C 时的电气规格

## Dimensions 结构尺寸

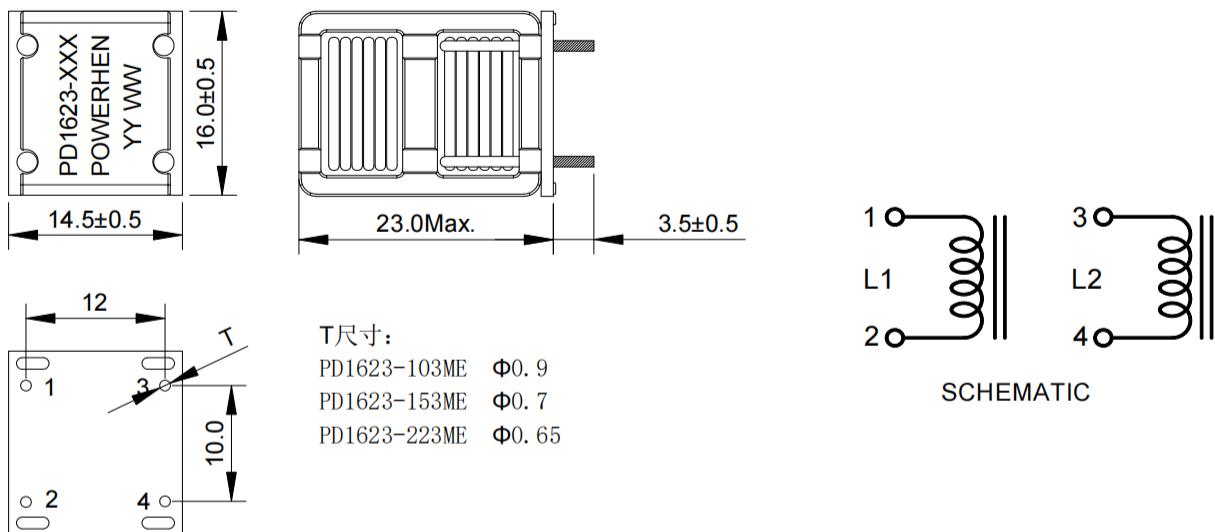


## Electrical Characteristic Curve 电气特性曲线

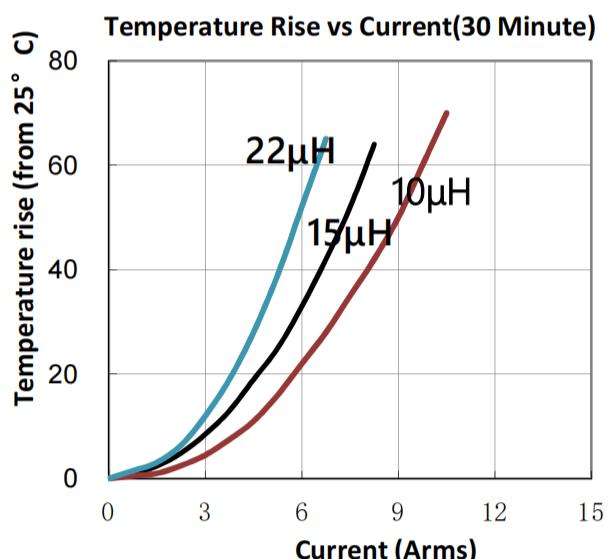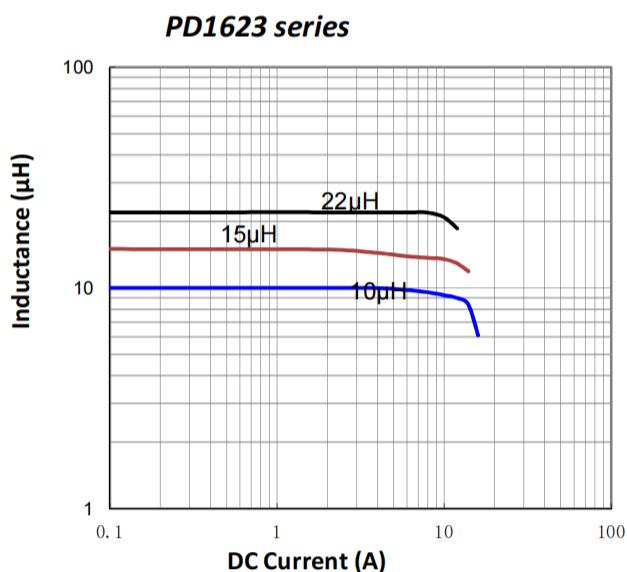

## ■ Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

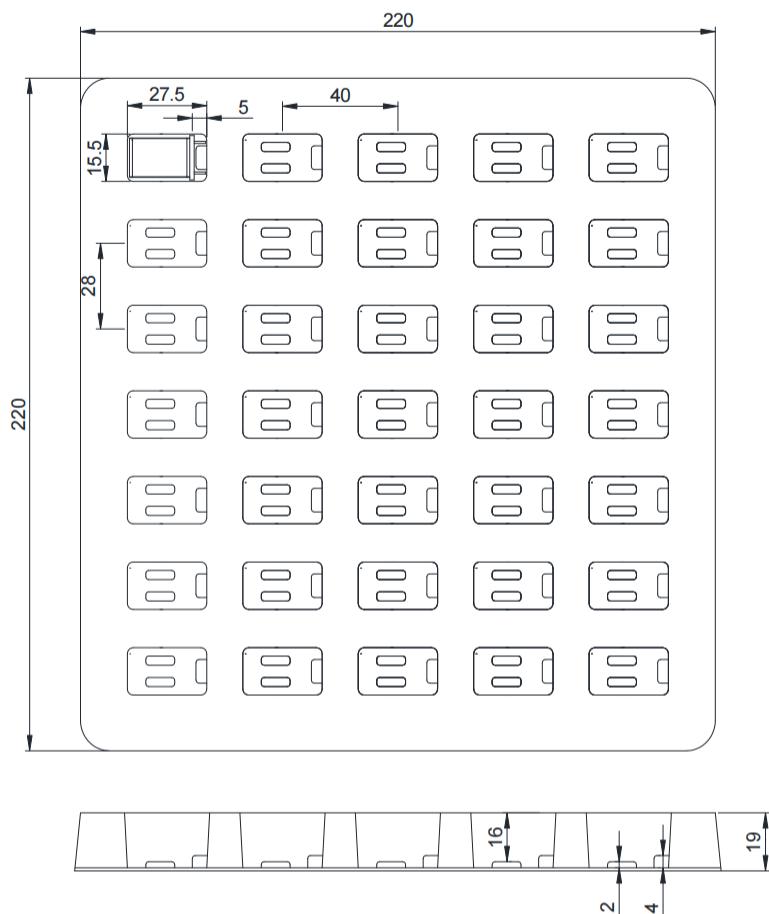

Weight 重量: 14.45~15.25g/PCS  
Packaging 包装数量: 35 PCS/盘